

EN54-24 5" Ceiling Speaker FCS-56PCEN

Features:

- Compliant with the EN54-24 standards
- Built-in 100v/70v transformer for PA & VA system
- Commercial fireproof ceiling speaker with transformer
- Ceramic connector, fire dome, 95°C fire-resistant cable and thermal fuse.
- Rated power output 6 /3 /1.5 /0.75 W at 100V
- 5" dual cone fire resistant finish and rustproof speaker unit
- V0 fire resistant ABS enclosure,back box and metal grille in white




EN54-24

Specifications:

Model	FCS-56PCEN
Description	EN54-24 5" Ceiling Speaker
Power Taps 100V	0.75W-1.5W-3W-6W
Sensitivity 1W/1m	92±2dB and Max 98±2dB
Frequency Response	105-15KHz
Speaker Driver	5" dual cone fire resistant finish and rustproof speaker unit
Finish	V0 fire resistant ABS enclosure,back box and metal grille in white
Mounting Way	In-ceiling spring clip quick installation
Cutout Size	Ø140mm
Dimensions	Ø165×89mm
Weight	0.6kg

Installation & Wiring diagram:

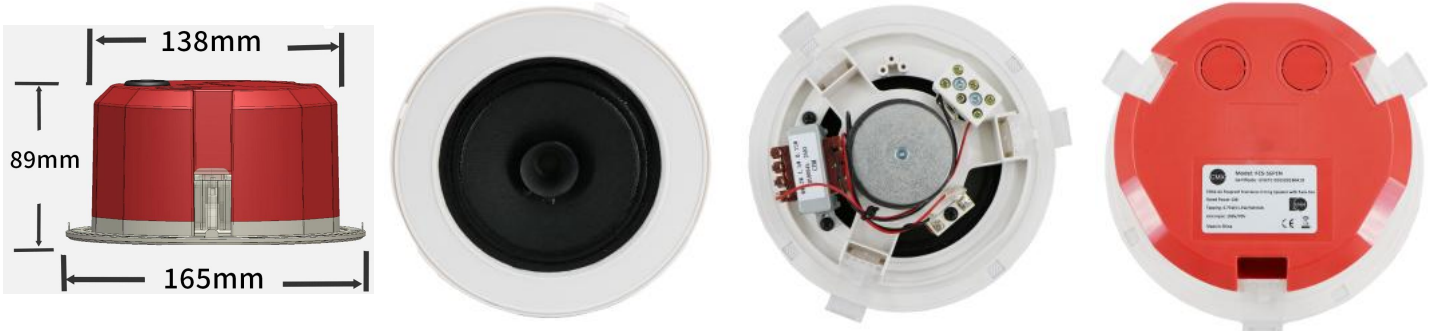

Frequency Response and Impedance Diagram:

