

# EN54-24 Wall Mount Speaker FWS-56MEN

## Feature:

- Compliant with the EN54-24 standards
- Commercial fireproof wall mount speaker with 100V/70V transformer
- Ideal for school, office, hotel and airport voice evacuation and PA system
- Rated power output 1.5W-3W-6W at 100V
- 5" full range driver unit
- Line input 100V or 70V with transformer
- Ceramic connector, fire dome, 95°C fire-resistant cable and thermal fuse
- Steel enclosure, steel grille and fire dome in white
- Wall mount or surface mount quick installation by screw hole




**EN54-24**

## Specification:

|                    |  |
|--------------------|--|
| Model              | FWS-56MEN  |
| Description        | EN54-24 Wall Mount Speaker                           |
| Rated Power Output | 1.5W-3W-6W   |
| Line Input         | 100V or 70V  |
| Frequency Response | 120-10KHz  |
| SPL(@1W/m)         | 92dB/Max 99dB  |
| Speaker Unit       | 5" full range driver unit                            |
| Dimension          | 165×165×60mm   |
| Material           | Steel enclosure, steel grille and fire dome in white |
| Mounting Way       | Quick installation by hanging screw hole             |
| Weight             | 1.4kg  |

## Dimension & Side View:

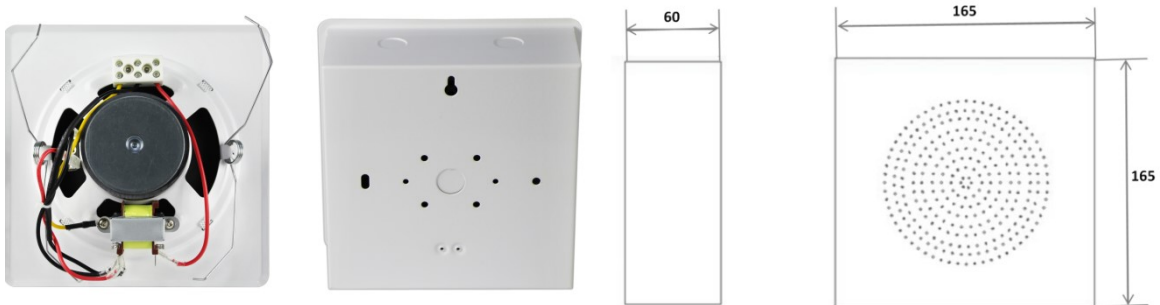

## Frequency Response VS SPL:

